



Sleek and highly efficient this reliable compact luminaire delivers a uniform photometric distribution and powerful performance of 130,000 maintenance free hours at 25°C .

Its excellent temperature range of -50°C to +55°C makes it a global lighting solution providing high output lighting at extreme temperatures.

Offering an easily maintainable driver and LED strip, the **Arran** provides all the advantages of an LED luminaire with the benefit of extending its serviceable life.

Mounting Options

- Floodlight
- Pendant
- Pole/Column
- High Bay



Standard Specification

Arran Ex n LED Floodlight

Type of Protection	Ex nA (Non Sparking) Ex tb (Dust Protected Enclosure)
ATEX Classification	Group II Category 3 GD Group II Category 2 D
Area Classification	Zone 2 and Zone 22 areas to EN 60079-10-1 and EN 60079-10-2 with installation to EN60079-14
Certificate	EC Type Examination Certificates CML 14ATEX4106 (Zone 2/22) CML 14ATEX3107 (Zone 21) IECEX Certificate of Conformity IECEX CML 14.0044
Coding	Ex nA IIC Gc Ex tc IIIC Dc Ex tb IIIC Db IP6X Refer to table for T Rating and Ambient
Enclosure	Aluminium alloy with epoxy powder finish
Entry	2 x M20 cable entries
Termination	3 core 6mm ² max. conductor with looping
Installation	Stirrup mounting bracket
Control Gear	Electronic Driver
Colour Temperature (CCT)	5000K (Cool White)
Maintenance	M5 Slotted Screws
Ingress Protection	IP66
Surge Protection	4kV line to line, 6kV line to earth
Electrical Supply	120-277V AC 50/60Hz 127-250V DC

Features

- ◆ Instant on crisp white light output
- ◆ Highly **Energy Efficient**
- ◆ **130,000** maintenance free hours at 25°C
- ◆ **Lower power consumption** than HID lamps
- ◆ **Low temperature applications to -50°C**



LED SOLUTIONS
For Harsh & Hazardous Locations




Std. Cat No.	Delivered Output	Power Consumption	TClass	T°C (Dust)	Ambient °C	Weight
ARRN/06L/LE	5885 lm	53W	T6 T5	160	-50 to +40 -50 to +55	13kg
ARRN/10L/LE	10489 lm	66W	T6 T5	160	-50 to +40 -50 to +55	13kg
ARRN/11L/LE	11976 lm	81W	T6 T5	160	-50 to +40 -50 to +55	13kg
ARRN/15L/LE	16880 lm	122W	T6 T5	160	-50 to +40 -50 to +55	13kg

Options - Suffix to Catalogue No.

/M25	M25 Cable entries	/DM	DALI Dimmable Driver (15L T rating reduces to T5)
-------------	-------------------	------------	--

Accessories Accessories should be ordered separately

	Order Code
Wire Guard	SARR1-0001
Anti Glare Shield	SARR1-0002
Pole Mounting Bracket Assembly	S2400-0002

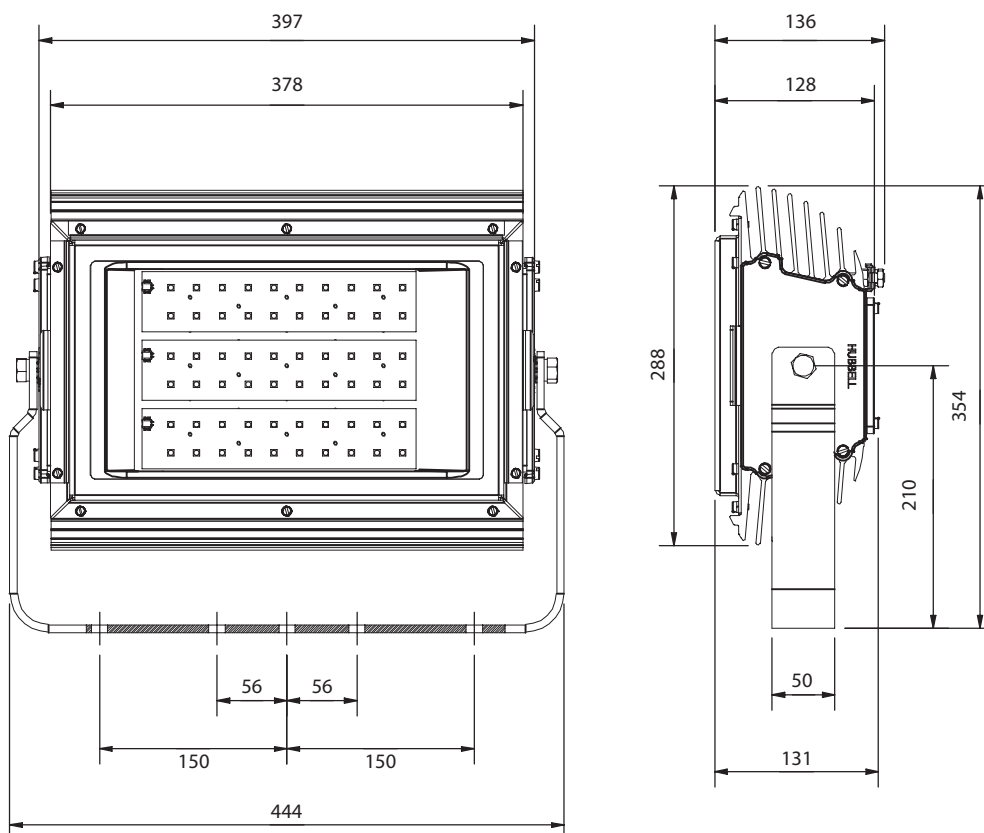

Product design and specifications are subject to change without notice. Please check the Chalmit website for latest specifications.
www.chalmit.com



MADE IN BRITAIN



LED SOLUTIONS
For Harsh & Hazardous Locations



Harsh & Hazardous