


Properties

Backer standard range of EGO capillary thermostats/temperature controller (TR) in stock are suitable for assembly in Backer terminal boxes and thermowells in immersion/insertion heaters.



Teknisk specifikation

Ambient temperature	Max 150°C
Control range tolerance	±2-3°C for min temperature and ±3-5°C for max temperature below
Breaking capacity	16A 400V
Electric connection	Tab terminals
Security	All electric connections and energizing components, must be done by a qualified electrician.

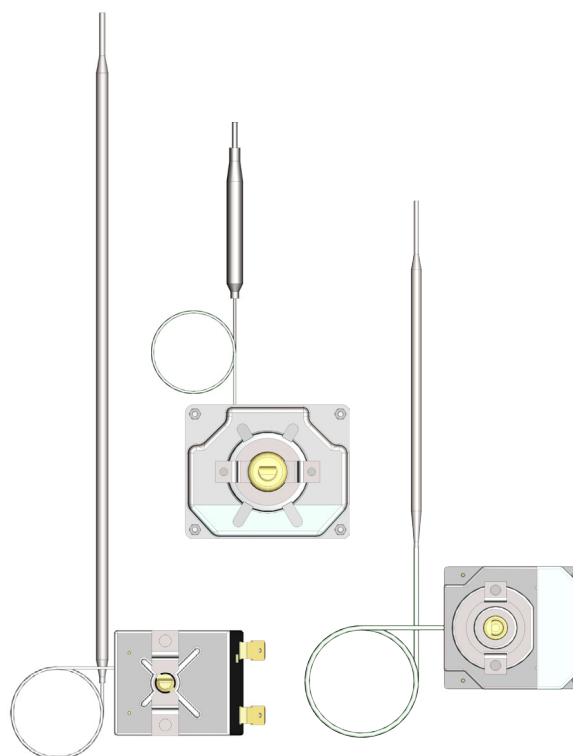


Standard assortment

Type	Contact function	Control range °C	Probe ØxL mm	Capillary L mm	Measures A/BxCxD	Article no
55.13011.130	Breaking 1-pole	30-90°C	4x240	390	28/18x51,5x35	1160127401
55.34011.110	Breaking 2-pole	30-90°C	6x130	400	53,5/23x50x46	1160119201
55.34211.010	Breaking 3-pole	30-90°C	6x240	400	53,5/23x50x46	1160047501
55.40012.070	Breaking 4-pole	30-90°C	6x130	880	53,5/23x50x60	1160210401
55.34001.150	Breaking 2-pole	0-50°C	4x240	400	53,5/19x50x46	1160160501

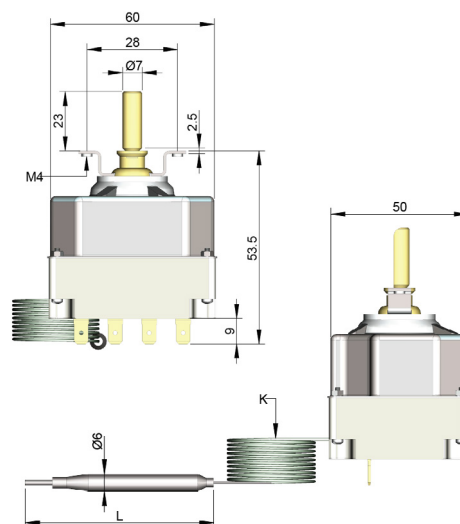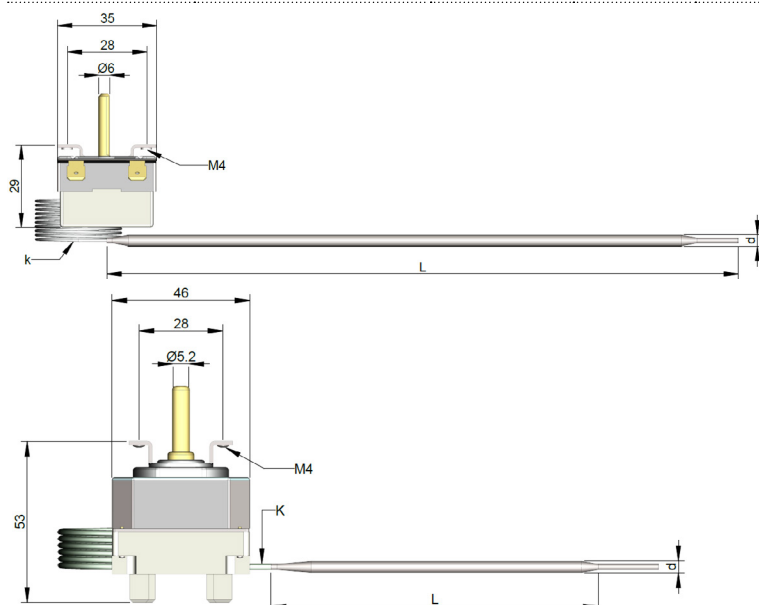

Circuit diagram

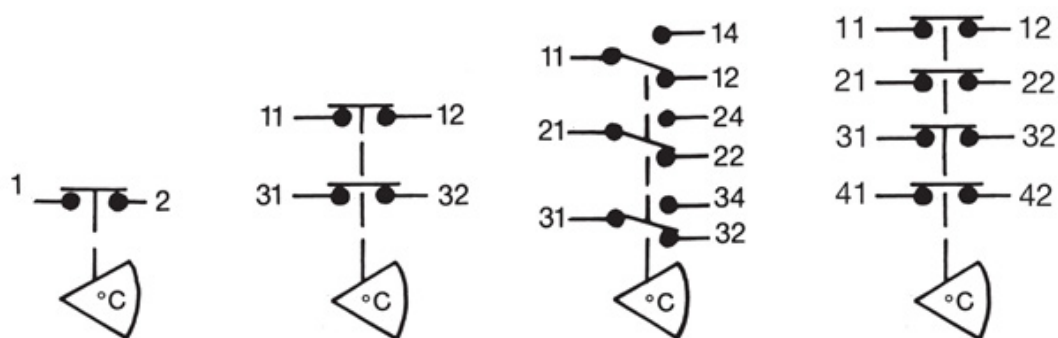

Options

Backer terminal boxes and immersion/insertion heaters, different options