


The KYTOLA® Seal Water Flow Meter Model SLM protects your seal and reduces downtime. Significant savings are achieved in maintenance and seal water costs.



- Reliable operation
- Solid construction
- Reduced seal maintenance
- Built-in cleaner does not interfere with operation
- Excellent corrosion and heat resistance
- All models alarm-ready
- Clear metering scale

ISO 9001 ISO 14001

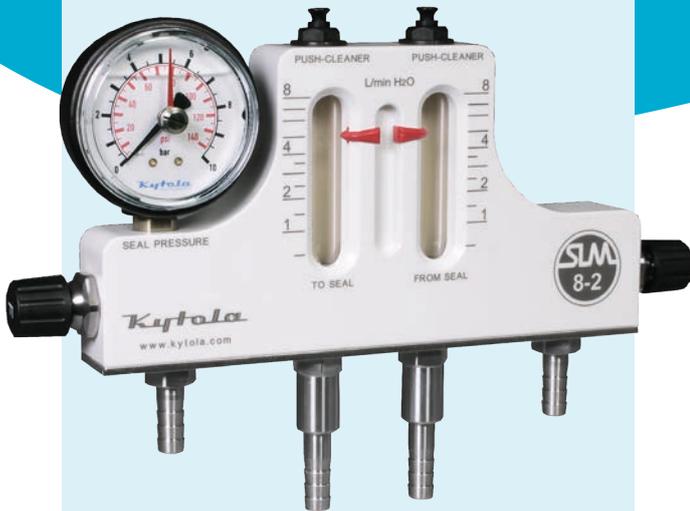

SEAL WATER FLOW METER SLM, SLMx-2

FEATURES

- Clog resistant flow control valve
- Built-in tube cleaner
- Hose barb connectors
- Alternative connectors on request
- Mounting bracket

SLM APPLICATIONS

- Single and double mechanical seals
- Gland packings
- Flush water
- Purging
- Other flow measurement

SLMx-2 APPLICATIONS

- Double mechanical seals

SLM Seal Water Flow Meter

Most pumps, agitators, refiners, screens etc. with shaft seals require an uninterrupted sealing water flow to ensure proper function of the seal.

The purpose of seal water is to:

- Cool the seal
- Lubricate the seal
- Prevent the process media from entering the seal chamber


Also the seal condition can be determined by proper monitoring of the seal water flow and pressure.

Stop pouring money into the drain

Adequate cooling and lubrication are essential for any kind of seal.

However, uncontrolled flow may multiply the necessary water and energy consumption. It is easy to create huge savings in costs by reducing excess water flow with accurate and proper adjustment of seal water flow and pressure.

The Kytola SLM Seal Water Flow Meter is especially designed for applications on pumps and mechanical seals in processes and applications where uninterrupted seal water flow is required.

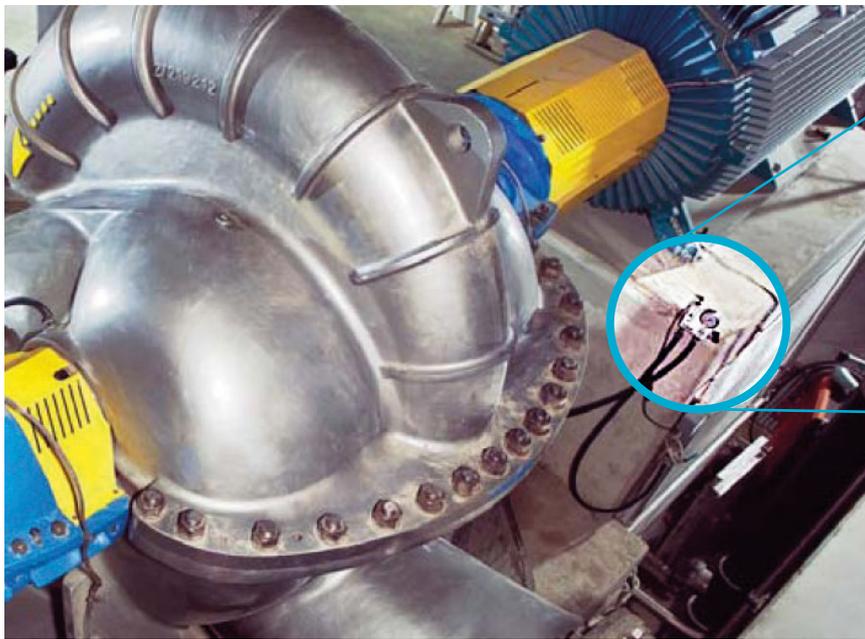

Innovative design offers durability and flexibility

The various Kytola seal water flow meter models guarantee compatibility with all seal types. The strong and compact design ensures maximum resistance to external impact.


The SLM has been specially optimized to withstand contaminated water. Reliable and accurate flow measurement is based on a variable area metering principle using a free-floating float. The seal water flow meter can also be easily equipped with an alarm output by utilizing an inductive proximity sensor.



Easy maintenance reduces down time

The built-in cleaner is designed not to interfere with operation. It effectively removes built-up contaminants.

The long, clear metering scale guarantees visibility and easy inspection of flow level.

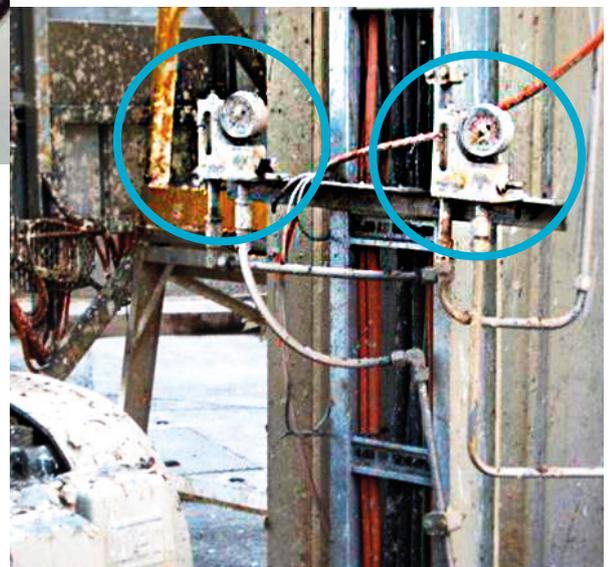

QUENCH SEALS

SLM




SINGLE SEALS AND PACKINGS

SLM with pressure gauge



DOUBLE MECHANICAL SEALS

SLM with pressure gauge and pressurizing valve

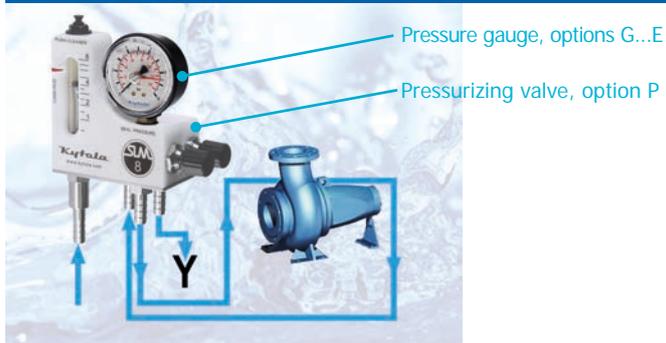

DOUBLE MECHANICAL SEALS

DUAL SLM with pressure gauge



SLM

SLM

| Range Code | Flow Rate | Adjustable Alarm Range | |
|-------------|-----------|------------------------|-----------|
| 0.025 – 0.4 | L/min | 0.03 – 0.25 | L/min 0.4 |
| 0.05 – 1 | L/min | 0.1 – 0.55 | L/min 1 |
| 0.1 – 3 | L/min | 0.4 – 2 | L/min 3 |
| 0.5 – 8.0 | L/min | 1 – 5 | L/min 8 |
| 1 – 13 | L/min | 2 – 9 | L/min 13 |
| 0.25 – 6 | USGPH | 0.5 – 4 | USGPH 6 |
| 1 – 15 | USGPH | 1.5 – 9 | USGPH 15 |
| 2 – 50 | USGPH | 6 – 35 | USGPH 50 |
| 0.1 – 2 | USGPM | 0.25 – 1.2 | USGPM 2 |
| 0.25 – 3.5 | USGPM | 0.5 – 2.5 | USGPM 35 |

Optional Accessories

| | |
|---|----|
| Inductive prox. sensor 20 – 250 VAC/DC | A |
| Inductive prox. sensor 10 – 55 VDC | F |
| Intrinsically safe NAMUR sensor | I |
| Intrinsically safe NAMUR sensor for SLM13 and SLM35 | Q |
| Pressure gauge 0 – 10 bar | G |
| Pressure gauge 0 – 25 bar | E |
| Standard POM body with optional borosilicate glass flow tube (instead of standard PSU tube) | L |
| Optional PVDF body (with borosilicate glass flow tube) | K |
| Optional PVDF body (with PSU flow tube) | KM |
| Pressurizing valve | P |
| Floor mounting stand | S |

Connectors

| | |
|---|-------------|
| 10 mm hose barb connectors, standard | leave blank |
| 10 mm straight tube connectors for compression fittings | R |
| 3/8" straight tube connectors for compression fittings | N |
| Other connection choices available on request | |

Example: SLM3-AGP (= Flow rate 0.1 – 3 L/min, alarm range 0.4–2 L/min, inductive prox. sensor 20–250 VAC/DC, pressure gauge 0–10 bar, pressurizing valve, 10 mm hose barb connectors)

DUAL SLM

SLM

| Range Code | Flow Rate | Adjustable Alarm Range | |
|------------|-----------|------------------------|----------|
| 0.05 – 1 | L/min | 0.1 – 0.55 | L/min 1 |
| 0.1 – 3 | L/min | 0.4 – 2 | L/min 3 |
| 0.5 – 8 | L/min | 1 – 5 | L/min 8 |
| 1 – 15 | USGPH | 1.5 – 9 | USGPH 15 |
| 2 – 50 | USGPH | 6 – 35 | USGPH 50 |
| 0.1 – 2.0 | USGPM | 0.25 – 1.2 | USGPM 2 |

Optional Accessories

| | |
|---|----|
| Inductive prox. sensor 20 – 250 VAC/DC | A |
| Two inductive prox. sensors 20 – 250 VAC/DC | AA |
| Inductive prox. sensor 10 – 55 VDC | F |
| Two inductive prox. sensors 10 – 55 VDC | FF |
| Intrinsically safe NAMUR sensor, 10 mm range | I |
| Two intrins. safe NAMUR sensors, 10 mm range | II |
| Pressure gauge 0 – 10 bar | G |
| Pressure gauge 0 – 25 bar | E |
| Standard POM body with optional borosilicate glass flow tube (instead of standard PSU tube) | L |
| Optional PVDF body (with borosilicate glass flow tube) | K |
| Optional PVDF body (with PSU flow tube) | KM |
| Floor mounting stand | S |





Connectors

| | |
|---|-------------|
| 10 mm hose barb connectors, standard | leave blank |
| 10 mm straight tube connectors for compression fittings | R |
| 3/8" straight tube connectors for compression fittings | N |
| Other connection choices available on request | |

Example: SLM8-2-AAG (= Flow rate 0.5 – 8 L/min, alarm range 1–5 L/min, two inductive prox. sensors 20–250 VAC/DC, pressure gauge 0–10 bar, 10 mm hose barb connectors)

Models SLM, SLMx-2

| | |
|------------------|---|
| Body material | POM (PVDF optional material, code "K") |
| Flow tube | PSU with standard POM body (optional borosilicate glass tube, code "L") or borosilicate glass tube with PVDF body, material code "K" (optional PSU tube, code "KM") |
| Metallic parts | AISI 316, float AISI 329 |
| O-ring seals | Viton® |
| Max. pressure | 20 bar |
| Max. temperature | 100°C |
| Connectors | 3/8" (10 mm) hose barb connectors |
| Weight | 1.2 kg (SLM), 2.4 kg (SLMx-2) incl. package, pressure gauge, pressurizing valve |

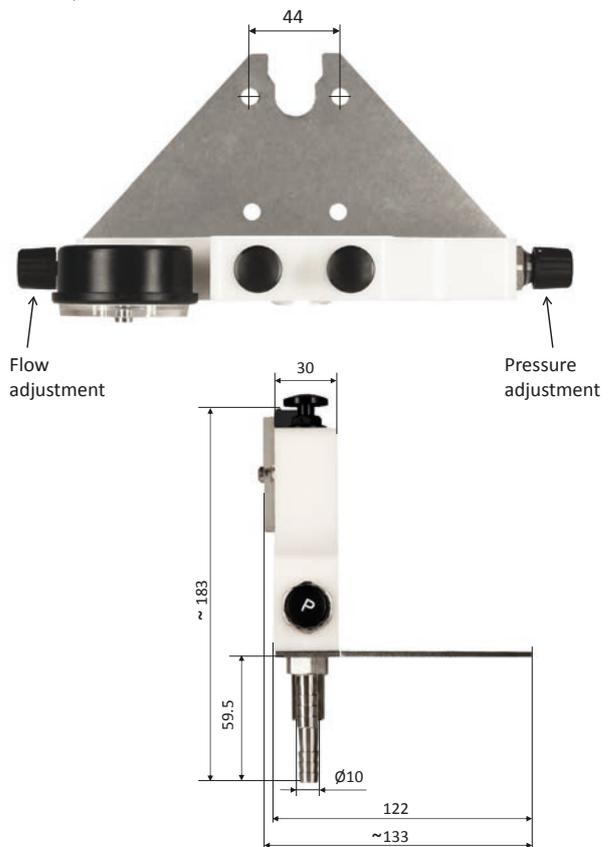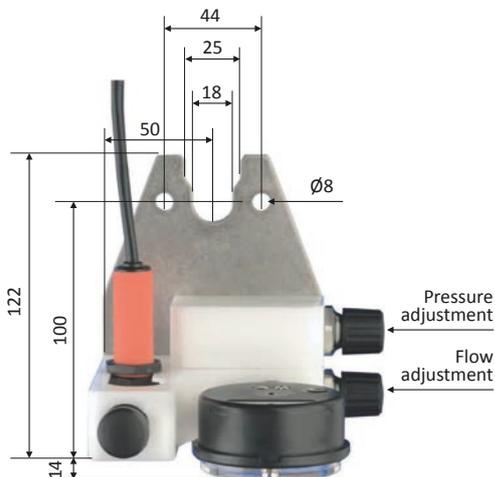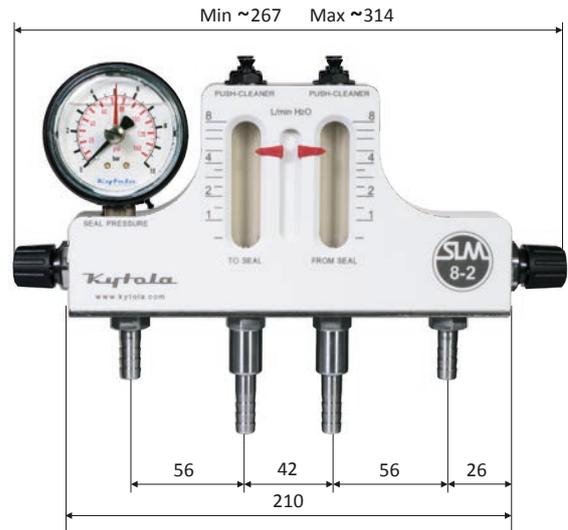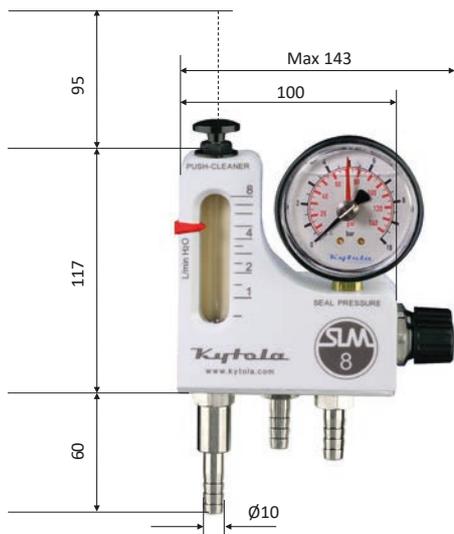

All measures in millimetres if not stated otherwise
 Copyright© Kytola Instruments Oy 2021. Dimensions and measurements are given within normal tolerances. Manufacturer reserves the right to changes without prior notification. File SLM_es46_en Published 6/2021.