

TurbiGuard

In-line Process Monitor for Medium to High Turbidity Measurement



Applications

- Turbidity measurement and monitoring in beverages such as beer, fruit juices, etc.
- Supervision of centrifuges, separators, whirlpools
- Monitoring of filter performance and filter breakthrough
- Determination of solids concentration
- Yeast dosing

Industries

- Beverage
- Food and Dairy Industry
- Chemical Industry
- Pharmaceutical Industry

Advantages

- Sealless design
- Extremely low maintenance
- High measuring span
- Linearized factory calibration over the whole measuring range
- Easy configuration and system integration

TurbiGuard

In-line Process Monitor for Medium to High Turbidity Measurement

Innovations with tangible benefits



Sealless Design

The days of spending time doing routine maintenance for regular replacement of seals have gone. The sealless design with sapphire windows is well-proven and established. This allows the TurbiGuard to be used in practically all process applications – from turbidity measurement in the brewing process to monitoring tasks in the chemical industry.



Simple Concept

A single instrument which can be widely used for almost all applications, simply mounted in a standard housing without the need of tools, combined with the highest flexibility in configuration and communication – just the way state-of-the-art instruments should be designed.



Quality- and Cost optimized

The TurbiGuard is factory calibrated with a true, linearized Formazine calibration. Once installed it is only necessary to perform an occasional zero check. The use of well-proven optical components guarantees the quality and reduces costs of purchase and maintenance. This results in a favourable total cost of ownership.



Flexible Configuration

For simple applications and system integration the instrument configuration and communication can be easily done using the integrated Ethernet interface with a web browser in combination with the existing outputs. For a more comfortable installation and operation the optional control unit SICON with touch screen technology and colour display can be connected.

Technical data

Sensor:


| | |
|------------------------|--|
| Measuring principle: | Absorption |
| Wavelength: | LED 880 nm |
| Measuring range: | 0 .. 100/0 .. 1000 EBC 0 .. 400/0 .. 4000 NTU 0 .. 69,000 ASBC |
| Resolution: | 0.5 EBC / 2 NTU / 34 ASBC |
| Path-length: | 10 mm |
| Outputs: | 1 x 0/4 .. 20 mA 2 x Open-Collector-Transistor |
| Installation: | In-line housing Varivent® or compatible |
| Pipe diameter: | ≥DN 40 |
| Material sensor head: | Stainless steel, 316L |
| Material housing: | Stainless steel, 304 |
| Windows: | Sapphire |
| Sample temperature: | -10 .. +100 °C / 14 .. +212 °F |
| Cleaning: | CIP/SIP compatible up to +120 °C / +248 °F @ 2 h |
| Pressure: | 1 MPa (10 bar) / +100 °C 145 psi / +212 °F |
| Ambient temperature: | -10 .. +50 °C / +14 .. +122 °F |
| Ambient humidity: | 0 .. 100 % RH |
| Protection degree: | IP66 |
| Power supply: | 9 .. 30 VDC |
| Power consumption max: | 2 W (3 W with Profibus DP) |

Operation:

| | |
|---------------------------|-------------------------------|
| Configuration: | Ethernet/Web-Browser |
| Communication (optional): | Profibus DP, Modbus RTU, HART |

Control unit SICON (optional):

| | |
|----------------------------|--|
| Power supply: | 9 .. 30 VDC |
| Power consumption max.: | 8 W (with instrument) |
| Display: | 1/4 VGA, 3.5" |
| Operation: | Touchscreen |
| Ambient temperature: | -10 .. +50 °C / +14 .. +122 °F |
| Ambient humidity: | 0 .. 100 % RH |
| Protection degree: | IP66 |
| Outputs: | 4 x 0/4 .. 20 mA, galv. separated 7 x digital |
| Inputs: | 5 x digital, freely configurable |
| Digital interfaces: | Ethernet, microSD-card, Modbus TCP |
| Optional modules (max. 2): | Profibus DP, Modbus RTU, HART 4 x 0/4 .. 20 mA outputs, galv. separated 4 x 0/4 .. 20 mA inputs |

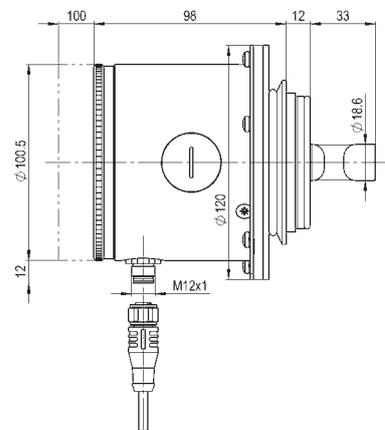

Your representative:



SIGRIST
PROCESS-PHOTOMETER

SIGRIST-PHOTOMETER AG

Hofurlistrasse 1 · CH-6373 Ennetbürgen
Tel. +41 41 624 54 54 · Fax +41 41 624 54 55
www.photometer.com · info@photometer.com

photometer.com/b3fe